




Digital ParkSign System



ParkGuide



Outdoor ParkSign

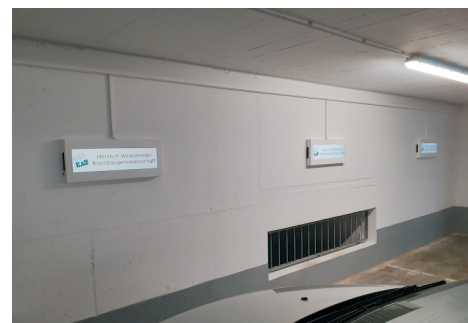


Indoor ParkSign

The VICOM ParkSign system is a complete solution for the digital allocation of parking spaces. For the first time, parking spaces can be reserved and allocated to specific people on a time-oriented basis.

The system consist of

- Indoor ParkSign
- Outdoor ParkSign
- Guiding outdoor totem
- Control software

VisGuide

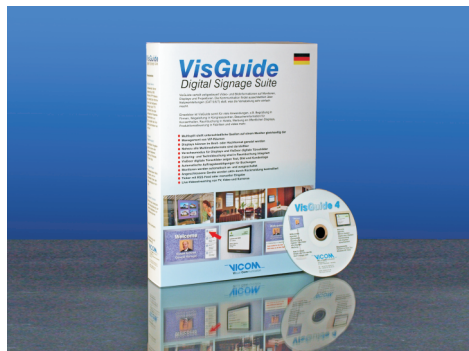

VisGuide is a special software with which car park signs and the content on the large information pillar are time-controlled and therefore displayed completely automatic.

The car park sign can be preset days, weeks or months in advance for a specific date and the information is then displayed on a **time-controlled basis via the internal calendar**.

Various templates can be prepared, which only need to be clicked on - this means that the type of information is already defined in the design: **VIP customer with name or licence plate**, management, reserved... If the ParkSign is not actively being used, the company logo e.g. is automatically displayed.

VisGuide also offers an optional MS Exchange/MS Outlook interface so that bookings can be transferred from there - the basic information, which runs as standard without these special bookings, can be defined flexibly.

ParkSign



ParkSign are digital car park signs. They have a display and an in-built computer for control and communication with the server. ParkSign is available in two versions:

ParkSign INDOOR

Protective housing painted in white, with wall bracket, high-quality IPS panel with approx. 300 cd/m² brightness, resolution 2560 x 1080 pixels, size approx. W x H 62 x 20 cm, with preconfigured player PC. Suitable for indoor car parks and multi-storey car parks.

ParkSign OUTDOOR

Protective housing with bright LED display that is easy to read even in sunshine, approx. 9.2 kg, 6000 cd/m², 2.5 mm pixel pitch, resolution 256 x 64 pixels, size without base approx. 77 x 25 x 9 cm, painted in RAL 7035 light grey.

ParkGuide



ParkGuide outdoor totem with a 55" or 65" high brightness monitor in portrait mode, brightness approx. 2500 nits, resolution 1920 x 1080 pixels, metal housing, **integrated air conditioning**, housing colour silver, **long-life operation**, temperature range -25° - +50° C, Ethernet and power supply cables 16 A, with weatherproof safety glass pane, height approx. 2200 mm, width approx. 1200 mm, weight approx. 200 kg incl. integrated heating, with electronic temperature control, lockable access door, incl. VisGuide Player PC with player software and playback licence for flexible playback of content, stand-alone content or linked content with ParkSign, mounting of the display via dowels or similar onto the floor.

VICOM[®]

Visual Communication

Kuhnbergstr. 15
73037 Goepfingen-Eschenbach
Germany

Tel. ++49 (0)7161 98403-0
eMail: info@vicom.de
<http://www.vicom.de>